PROFESSIONAL LOUDSPEAKERS

FD375

37mm - 35 W - 107 dB - 8 Ohm



NOMINAL SPECIFICATIONS

Throat Diameter	N/A
Overall Diameter	115.2/102 mm (4.54/4.0 in)
Bolt Circle Diameter	107 mm (4.21 in)
Baffle Cutout Diameter	91 mm (3.58 in)
Depth	79 mm (3.11 in)
Flange and gasket Thickness	5.5 mm (0.22 in)
Net Weight	**1.24 kg (2.7 lb)**
Shipping Box (Single carton box)	150 x 123 x 102 mm (5.9 x 4.8 x 4.0 in)
Shipping Weight	1.3 kg (2.9 lb)

PART NUMBER


Faston Terminals - 8 Ohm Version	00374393
Recone Kit - 8 Ohm Version	R0374111


TECHNICAL PARAMETERS


Nominal Impedance	8 Ohm
Minimum Impedance	6.6 Ohm
AES Power Handling **(1)**	35 W
Maximum Power Handling (2)	**70 W**
Minimum Crossover Frequency **(3)**	2.6 kHz
Sensitivity (1W/1m) (4)	**107 dB**
Frequency Range	2.6÷20 kHz
Dispersion Angle	40°
Voice Coil Diameter	**37 mm (1.46 in)**
Winding Material	**Al**
Former Material	Kapton
Diaphragm Material	**Ketone Polymer**
Diaphragm Shape	Annular
Winding Depth	2.1 mm (0.08 in)
Magnetic Gap Depth	2.6 mm (0.10 in)
Flux Density	1.5 T
Magnet	Ferrite Ring
Re	5.5 Ohm
Phase Plug Design	Annular
Exit Angle	N/A
NET Air Volume filled by HF Driver	0.3 dm^3 (0.011 ft^3)


NOTES:

(1) 2 Hours Test According to AES 2-1984 Rev. 2003
(2) Maximum power is defined as 3dB greater than nominal power.
(3) 12 dB/oct or higher slope high-pass filter
(4) Averaged within the frequency range

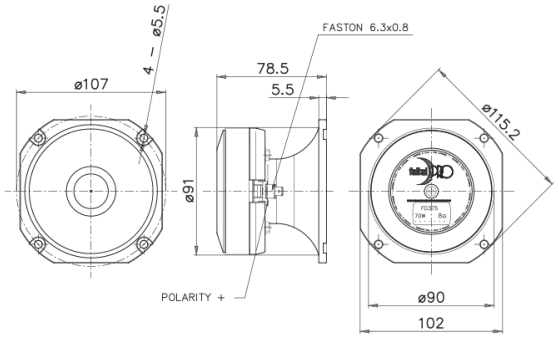

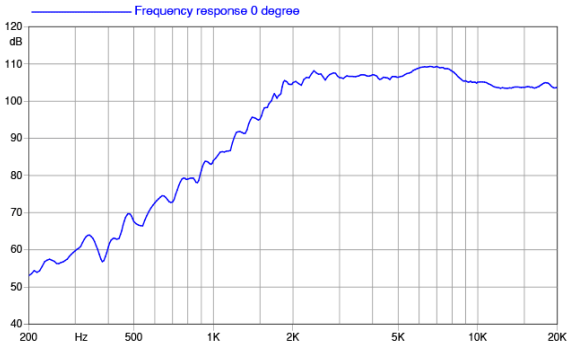

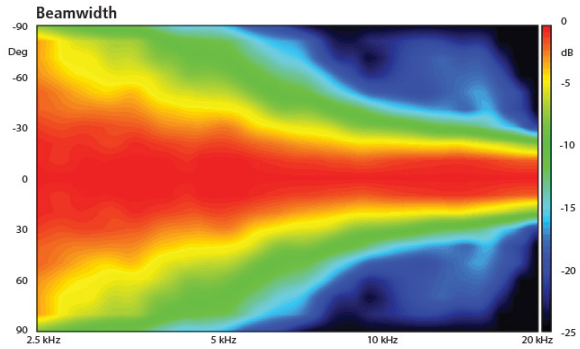

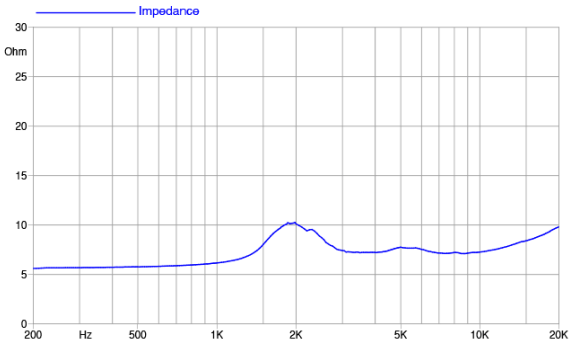

©Copyright 2026 **Faital S.p.A.** • All rights reserved.