faital PRO PROFESSIONAL LOUDSPEAKERS

12PR330

12" - 300 W - 97 dB - 16 Ohm



NOMINAL SPECIFICATIONS

Nominal Diameter	300 mm (12 in)
Overall Diameter	316 mm (12.44 in)
Bolt Circle Diameter	298.5 mm (11.75 in)
Baffle Cutout Diameter	282 mm (11.10 in)
Depth	135 mm (5.31 in)
Flange and Gasket Thickness	12 mm (0.47 in)
Net Weight	**4.3 kg (9.5 lb)**
Shipping Box (Single Carton Box)	350 x 346 x 190 mm (13.8 x 13.6 x 7.5 in)
Shipping Weight	5 kg (11.0 lb)

TECHNICAL PARAMETERS


Nominal Impedance	16 Ohm
Minimum Impedance	13.2 Ohm
AES Power Handling **(1)**	300 W
Maximum Power Handling (2)	**600 W**
Sensitivity (1W/1m)	**97 dB**
Frequency Range	50÷4000 Hz
Voice Coil Diameter	**65 mm (2.56 in)**
Winding Material	Al
Former Material	Glass Fiber
Winding Depth	17.2 mm (0.68 in)
Magnetic Gap Depth	**8 mm (0.31 in)**
Flux Density	1.2 T
Magnet	Ferrite Ring
Basket Material	Aluminum
Demodulation	No
Cone Surround **(3)**	M-Roll
NET Air Volume filled by Loudspeaker	1.9 dm^3 (0.067 ft^3)
Spider Profile	1x variable height waves


THIELE & SMALL PARAMETERS


Fs	52 Hz
Re	11.3 Ohm
Qes	0.53
Qms	5.8
Qts	0.49
Vas	76.3 dm^3 (2.69 ft^3)
Sd	533 cm^2 (82.62 in^2)
Xmax **(4)**	7.27 mm
Xdamage **(5)**	15.25 mm
Mms	48.7 g
Bl	18.5 N/A
Le	1.34 mH
Mmd	34.8 g
Cms	0.19 mm/N
Rms	2.7 kg/s
Eta Zero	1.98 %
EBP	98 Hz

NOTES:

(1) 2 Hours Test According to AES 2-1984 Rev. 2003
(2) Maximum power is defined as 3dB greater than nominal power.
(3) Treated Polycotton
(4) Xmax= [(winding depth - magnetic gap depth)/2] + (magnetic gap depth/3)
(5) Maximum excursion before permanent damage

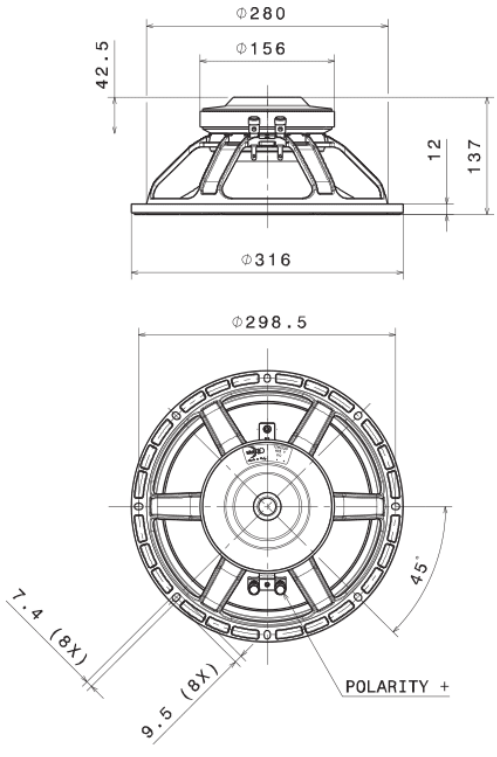

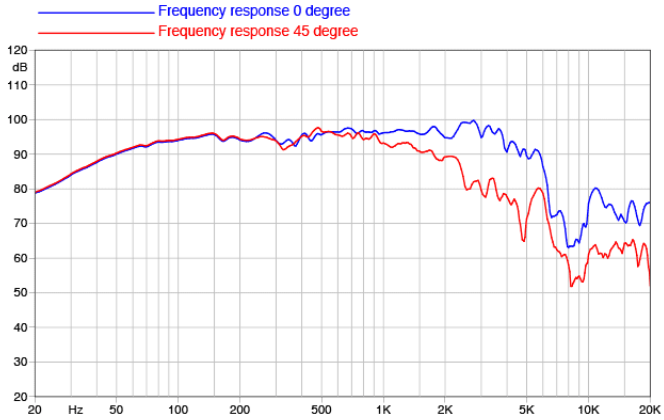

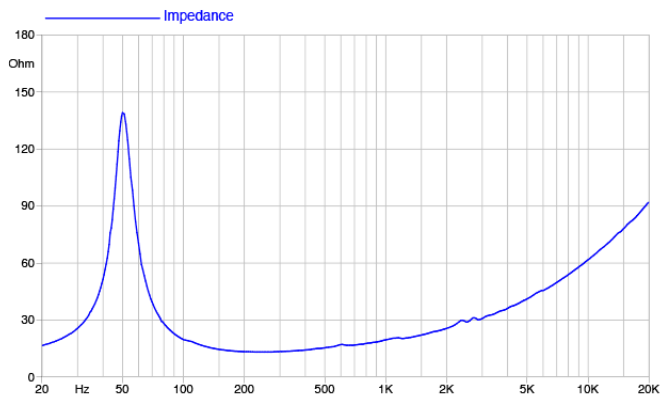

©Copyright 2026 **Faital S.p.A.** • All rights reserved.