faital PRO PROFESSIONAL LOUDSPEAKERS

10PR330

10" - 300W - 95 dB - 16 Ohm



NOMINAL SPECIFICATIONS

Nominal Diameter	250 mm (10 in)
Overall Diameter	261 mm (10.28 in)
Bolt Circle Diameter	246 mm (9.69 in)
Baffle Cutout Diameter	230 mm (9.06 in)
Depth	111 mm (4.37 in)
Flange and Gasket Thickness	12 mm (0.47 in)
Net Weight	**4.1 kg (9.0 lb)**
Shipping Box (Single Carton Box)	282 x 280 x 140 mm (11.1 x 11.0 x 5.5 in)
Shipping Weight	4.7 kg (10.4 lb)

PART NUMBER

Push Terminals - 16 Ohm Version	02504302
Recone Kit - 16 Ohm Version	R2504302

TECHNICAL PARAMETERS


Nominal Impedance	16 Ohm
Minimum Impedance	13.4 Ohm
AES Power Handling **(1)**	300 W
Maximum Power Handling (2)	**600 W**
Sensitivity (1W/1m)	**95 dB**
Frequency Range	60÷3150 Hz
Voice Coil Diameter	**65 mm (2.56 in)**
Winding Material	Al
Former Material	Glass Fiber
Winding Depth	17.2 mm (0.68 in)
Magnetic Gap Depth	**8 mm (0.31 in)**
Flux Density	1.2 T
Magnet	Ferrite Ring
Basket Material	Aluminum
Demodulation	No
Cone Surround **(3)**	M-Roll
NET Air Volume filled by Loudspeaker	1.3 dm^3 (0.046 ft^3)
Spider Profile	1x variable height waves


THIELE & SMALL PARAMETERS


Fs	60 Hz
Re	11.3 Ohm
Qes	0.4
Qms	3.6
Qts	0.36
Vas	32.9 dm^3 (1.16 ft^3)
Sd	348 cm^2 (53.89 in^2)
Xmax **(4)**	7.27 mm
Xdamage **(5)**	15.25 mm
Mms	36.1 g
Bl	19.5 N/A
Le	1.12 mH
Mmd	28.8 g
Cms	0.19 mm/N
Rms	3.8 kg/s
Eta Zero	1.70 %
EBP	150 Hz


NOTES:

(1) 2 Hours Test According to AES 2-1984 Rev. 2003
(2) Maximum power is defined as 3dB greater than nominal power.
(3) Treated Polycotton
(4) Xmax= [(winding depth - magnetic gap depth)/2] + (magnetic gap depth/3)
(5) Maximum excursion before permanent damage

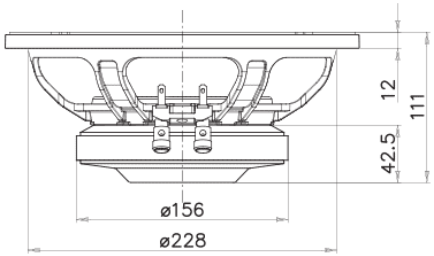

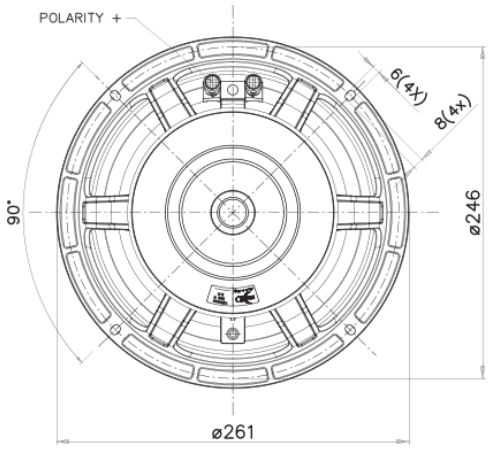

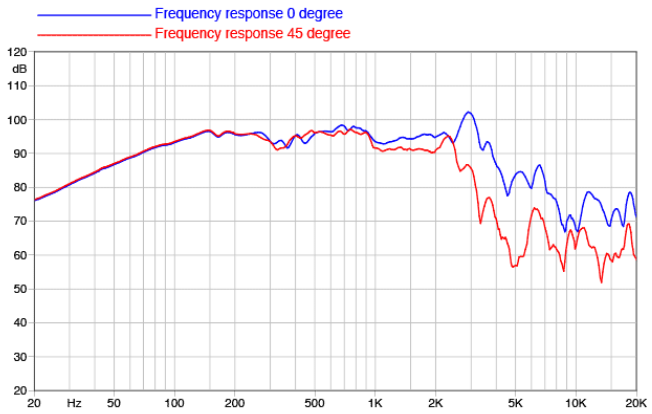

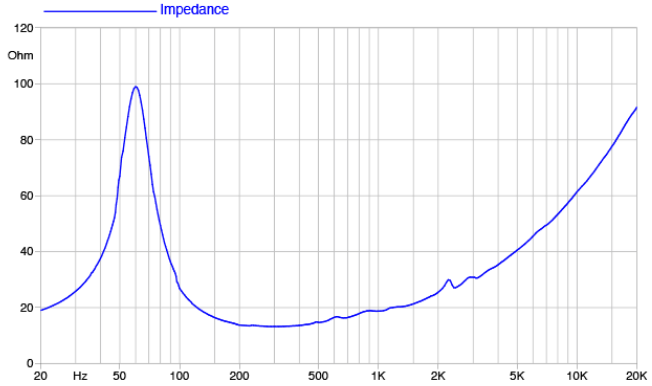

©Copyright 2026 **Faital S.p.A.** • All rights reserved.